

CURB FOX 5000



► THE ECONOMICAL AND VERSATILE CURB AND GUTTER SLIPFORMER ◀





CONVEYOR ADDS VERSATILITY

The Curb Fox 5000 Slipformer can be equipped with an optional belt conveyor for more flexibility and productivity. With the conveyor mounted, the CF5000 can work at different grade levels in relation to the concrete truck. The conveyor allows the concrete mixer to work to the side of the prepared grade,

instead of on it. And the hydraulically powered conveyor gives the paver a steady supply of concrete mix within the required slump range. At 6 ft/1.8 m long and 18 in/46 cm wide, the conveyor is compact and efficient. Equipped with the conveyor, the Curb Fox 5000 still transports within legal width.



FLEXIBLE

The Curb Fox 5000 offers contractors a proven machine for a full range of curb and gutter applications. Paves sections up to 24"/60 cm wide and 20"/50 cm high in the offset position. The CF5000 also slipforms sidewalk up to 5 ft/1.5 m wide in the center position.

ADAPTABLE

Utilizes all wheel, hydrostatic drive for operation on almost all subgrade conditions. Heavy duty, foam filled tires give high flotation in soft areas, and years of trouble free performance.



RELIABLE

High quality components and design insure consistent performance. The precise 'electronic over hydraulic' sensor system provides accurate control of elevation, steering and slope. Optional tight radius kit allows paving radii down to 30"/75 cm.

COMPACT

Within legal width (102"/259 cm), the Curb Fox 5000 transports easily on a small trailer behind a pickup truck. The compact design enables it to operate in tight places.


SIMPLE

Operators and crews learn how to run the Curb Fox 5000 in just a few days. This means less training time and more profitable paving time.

EFFICIENT

Curb Fox 5000 provides all these features at an economical price. It is not necessary to pay a high price to get high quality results.



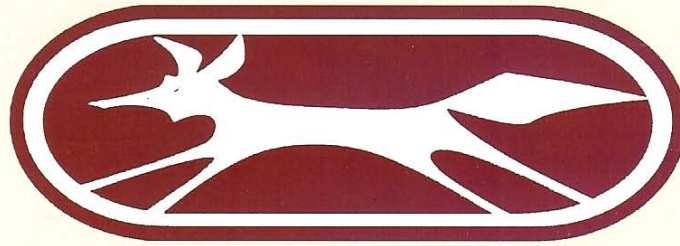

CURB FOX 5000



SPECIFICATIONS

DIMENSIONS

Length: 144"/3.6 m

Width: 100"/2.5 m

Height: 78"/195 cm

Weight: 5000 lb/2272 kg, 5400 lb/2455 kg with conveyor

POWER

28 hp diesel engine standard

33 hp turbo-charged diesel engine optional

TRACTION

All wheel drive insures operation in almost any grade condition. Three 23"/57 cm diameter tires with 'V' tread provide high flotation

CONTROLS

Precise electronic over hydraulic sensors control steering, front and rear elevation, and slope. Steering feedback sensor allows radius turning automatically. Optional tight radius kit for radii under 10 ft/3 m.

HYDRAULICS

Main pump rated 20 gpm/75.7 lpm. Drive pump rated 16 gpm/60.5 lpm. Cylinders for elevation and slope 3"/8 cm X 12"/30 cm and for steering 2.5"/6.25 cm X 12"/30 cm.

CAPABILITIES

Curb and gutter up to 24"/60 cm wide in offset position and (optional) sidewalk up to 5 ft/1.5 m in center position.

CAPACITIES

Hydraulic reservoir: 30 gal/113.5 liter.

Fuel: 15 gal/157 liter.

CONVEYOR (OPTIONAL)

18"/180 cm wide belt, 72"/180 cm between pulley centers.

We reserve the right to make design improvements and/or changes in specifications at any time without notice and without incurring any obligation related to such changes.

CURB FOX EQUIPMENT, LLC

925 Confederate Avenue

Salisbury, NC 28144 USA

Telephone 704-638-0405

Fax 704-638-0494

Email: tim@curbfox.com

Website: www.curbfox.com