


Superior Performance Through Quality Equipment

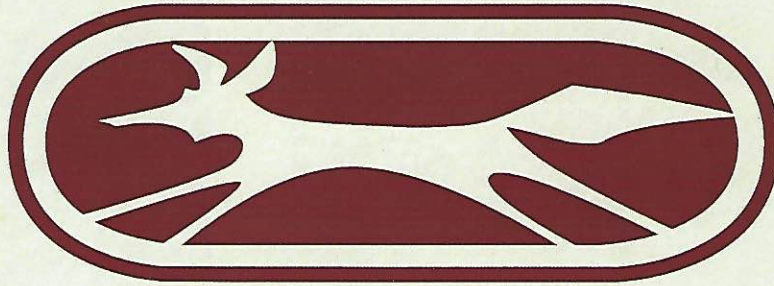

CURB FOX 5000-T MULTI-PURPOSE PAVER

SIMPLE VERSATILITY:

Pave the full range of curb, curb and gutter, sidewalk, and median barrier with the Curb Fox 5000-T. Whether it's tight radii in parking lots, renovation work on existing streets, or wide open housing developments, the 5000-T will do the job quickly and efficiently.

Plus, with the CF5000-T you can now slipform sections up to 10 ft/3 m wide and barriers up to 39 in/1 m high. With the new, optional heavy-duty tracks and added weight, the Curb Fox 5000-T can handle most multi-purpose paving applications.

ECONOMICAL:

As the smallest all-track slipformer on the market, the Curb Fox 5000-T gives you the traction and flotation of track drive without the massive size and cost. But the 5000-T still utilizes high-quality Moba controls to insure precise machine control of alignment and elevation.

SPEED AND MOBILITY:

Don't let the size fool you. The CF5000-T has paved up to 10,000 ft/3100 m in a day on the right job. Plus it can unload and be paving on the job in 15 minutes. Likewise, it can load on a small trailer and be going to the next job in 15 minutes.





CURB FOX 5000-T SPECIFICATIONS

Performance:

Curb & gutter or small barrier sections up to 39 in/1 m wide and 39 in/1 m high in the offset position; sidewalk or slab up to 10 ft/3 m wide in the center position.

Power:

50 hp standard, water-cooled diesel engine,
74 hp turbo-charged diesel optional

Speed:

Paving up to 50 fpm/15 mpm. Travel: 80 fpm/25 mpm

Radius:

Minimum 2.5 ft/75 cm for curb, 3 ft/1 m for
curb & gutter

Controls:

Proportional Automatic controls for steering, elevation
and Slope.

Tracks:

59 in/1475 mm Long X 9 in/225 mm Wide X 12 in/300
mm High.

Hydraulics:

Main pump: 23 gpm/87 lpm pressure
compensated, Drive pump: 16 gpm/80 lpm
closed loop for hydrostatic drive.

Conveyor:

8 ft/2.44 long X 18 in/46 cm wide belt with
6.7 Cu. In. hydraulic motor.

Options:

- Up to 6 vibrators for sidewalk and barrier applications.
- Zero-clearance sidewalk paving from 48 in/1.2 m width up to 6 ft/1.83 m width.
- Lights for night time operation, includes four (4) Individual lights with heavy-duty alternator

Dimensions:

Standard unit: 16 ft/5 m Long X 8.5 ft/2.6 m Wide
X 8 ft/2.44 m High, and 10,000 lb/4545 kg.

CURB FOX EQUIPMENT, LLC

925 Confederate Avenue
Salisbury, NC 28144 USA



Phone: 704-638-0405

Fax: 704-638-0494

Email: tim@curbfox.com

We reserve the right to make design improvements and/or changes in specifications at any time without notice and without incurring any obligation related to such changes.

WWW.CURBFOX.COM